

PINNACLE

Value from Ideas



مشاوره ، طراحی و توزیع سیستم های نظارت تصویری
تولید کننده سیستم های مدار بسته و حفاظتی با برند پیناکل

شرکت دیدافزار سیستم
DIDAFZAR SYSTEM CO.



PINNACLE

Value from Ideas



Professional Video Security Solution



کلیه محصولات این شرکت دارای دو سال گارانتی طلایی
و پنج سال خدمات پس از فروش می باشد.

آدرس: تهران، خیابان ولیعصر، بالاتر از پارک ساعی
پلاک ۲۲۰۹، ساختمان صدف، طبقه سوم، واحد سوم

Web : www.didafzar.ir
Email : info@didafzar.ir

تلفن : ۰۲۱-۸۸۶۶۲۲۱۱
فکس : ۰۲۱-۸۸۷۸۶۳۰۸

مشاوره، طراحی و مجری سیستم های حمل و نقل هوشمند

تولیدکننده سیستم های نظارت تصویری با برند حافظ و پیناکل

شرکت دیدافزار سیستم، عضو اتحادیه سر اسری شرکت های فنی و مهندسی حفاظت الکترونیک و شبکه های ایمنی، با بیش از ۸۰ پرسنل متخصص و بهره گیری از تجربه ۳۷ ساله خود در زمینه سرمایه گذاری، مشاوره، طراحی، نصب و فروش سیستم های هوشمند ترافیکی و سیستم های نظارت تصویری و حفاظتی در ایران فعالیت می نماید و با ارتباطاتی که با معتبرترین و مشهورترین کمپانی های فعال در این زمینه دارد، توانسته جدیدترین محصولات را با آخرین تکنولوژی روز دنیا به بازار ایران عرضه نماید، این شرکت در سال های اخیر توانسته خود را به عنوان شرکتی پیشرو در زمینه پروژه مطرح نماید و با اجرای پروژه های بزرگ ملی از جمله سیستم مکانیزاسیون محدوده طرح ترافیک شهرهای تهران، اصفهان، کرج، قم و ... در جهت اهداف خود قدم برداشته و به کشور خود خدمت نماید، همچنین شرکت دیدافزار سیستم در راستای حمایت از تولید ملی و کالای ایرانی، با افتخار توانسته است قدمی نو در تولید محصولات صنعت سیستمهای حفاظتی و مدار بسته برداشته و از اواخر سال ۱۳۹۷ محصولات خود را با بالاترین کیفیت ارائه نماید.

به طور کلی فعالیت های این شرکت در واحدهای ذیل انجام می شود :

- واحد مرکزی جهت امور بازرگانی داخلی و خارجی
- واحد فنی جهت مشاوره، طراحی و اجرای پروژه ها
- واحد تحقیق و توسعه جهت تولید تجهیزات و نرم افزار
- واحد خدمات پس از فروش جهت پشتیبانی و تعمیرات
- واحد ساخت جهت تولید محصولات حفاظتی و مدار بسته



رویکرد اصلی این شرکت جهت طراحی و اجرای پروژه های حفاظتی تمرکز بر نیاز مشتری می باشد و این دیدگاه، طراحی همه پروژه ها با یک برند خاص را رد میکند، از طرفی ما معتقدیم هر کمپانی در تولید یک سری از محصولات پیشتاز بوده و محصولاتش از لحاظ کیفیت و قیمت، قابل رقابت با کمپانی های دیگر می باشد، لذا انتخاب محصولات برندهای مشهور دلیلی بر کیفیت بالا و مقرون به صرفه بودن آن نیست و همچنین سیستمی که به درستی تهیه و نصب شود، یک سیستم کارآمد با هزینه تعمیر و نگهداری کم و عمر طولانی می باشد، از جمله کمپانی هایی که در این سال ها موفق به اخذ نمایندگی و ارائه محصولات آنها شده ایم عبارتند از:



سیستم نظارت تصویری بیش از ۲۲۰۰ شعبه بانک های ملت، ملی، سپه، صادرات، مسکن و ...



سیستم نظارت تصویری و حفاظت پیرامونی پالایشگاه های تهران، بندرعباس، امفهان



سوخت گیری و فرودگاه های شهرهای تهران، مشهد، شیراز، اهواز، کاشان و ...



اجرای مکانیزاسیون کنترل ترافیک شهرهای تهران، امفهان، قم، کرج، دماوند و ...

برخی از پروژه های انجام شده



تضمین بهترین کیفیت
همراه با قیمت مناسب

PINNACLE
Value from Ideas




برند پیناکل به معنای اوج، توسط شرکت دیدافزار سیستم ثبت و محصولات آن در حوزه سیستم های نظارت تصویری به تعداد انبوه و با همکاری مشترک کمپانی های معتبر، در تنوع بسیار بالا و با تکنولوژی های روز دنیا در فورمت های IP، TVI، CVI و AHD در کشور عزیزمان ایران تولید می گردد. در حال حاضر مقداری از قطعات ساخته شده این محصولات از کشورهایی همچون کره جنوبی، تایوان و چین تامین شده و مابقی آن در خط تولید این شرکت توسط متخصصین مجرب و کارآموده، در واحدهای طراحی، قالب سازی، تزریق، مونتاژ، کنترل کیفیت، بسته بندی و چاپ بارعبایت دقیق ترین و حساس ترین متدهای روز در کشورمان تولید و به بازار عرضه می گردد. این شرکت در جهت تحقق خواسته های مشتریان محترم و اهداف عالی به شرکت، همواره با استفاده از بهترین تکنولوژی ها، مرغوبترین قطعات اولیه، رعایت استانداردهای ملی و بین المللی با پشتکار و علاقه وافر در جهت حفظ و ارتقا کیفیت محصولات تولیدی تلاش می نماید.




راهنمای نام گذاری محصولات پیناکل

Camera Rule Numbering

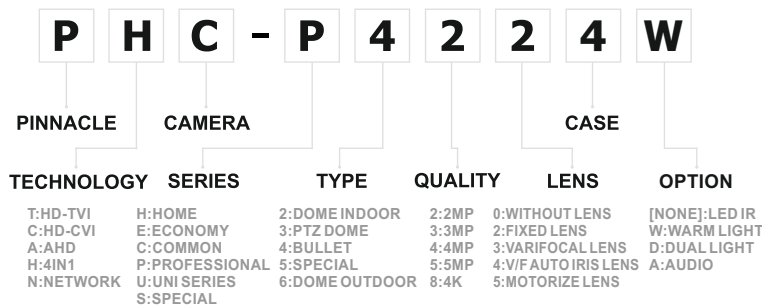

Recorder Rule Numbering

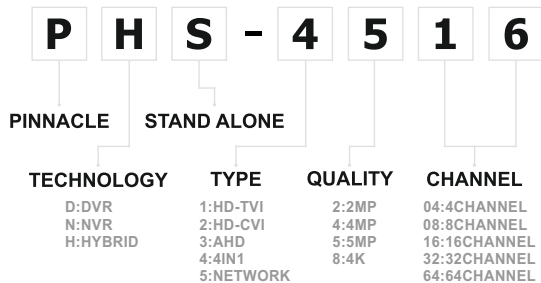

هدف نهایی جلب رضایت مشتری است، بنابراین مسئولیت ما با فروش پایان نمی پذیرد.

۲۴ ماه گارانتی طلایی (Golden Guarantee): شرکت دیدافزار سیستم کلیه

محصولات خود را با ۲ سال گارانتی و ۵ سال خدمات پس از فروش ارائه می دهد،

و واحد تعمیرات این شرکت با برخورداری از تیم مجرب و کارآزموده خود در

زمینه تامین و نگهداری بسیاری از مراکز مهم کشور فعال بوده و با تاسیس دفتر

خدمات پس از فروش و پشتیبانی فنی خود همیشه پاسخگوی نیاز مشتریان

میباشد، این واحد امکاناتی را فراهم نموده که قادر خواهد بود تجهیزات را در

کمترین زمان ممکن عیب یابی و تعمیر نماید، همچنین این دفتر جهت رفاه حال

مشتریان و همکاران خود اقدام به راه اندازی سامانه اطلاع رسانی نموده است و

در حال حاضر شما میتوانید مراحل کالای تعمیری خود را از طریق این سامانه

دریافت و پیگیری نمایید، دفتر فنی و پشتیبانی این شرکت نیز همواره جهت

رفع مشکلات احتمالی و راهنمایی تلفنی فعال بوده و به صورت ۲۴ ساعته

پاسخگو همکاران می باشد، از این رو شما می توانید در ساعات اداری با شماره

شرکت و داخلی ۱۱۲ تماس گرفته و خارج از وقت اداری نیز با شماره موبایل

۰۹۰۱۱۷۷۱۶۳۱ جهت پرسش های فنی و رفع مشکلات تماس حاصل نمایید.

2 MEGA PIXEL FIXED LENS TURBO HD CAMERA



**PHC-C2224
PHC-P2224**

2MP LED IR DOME CAMERA

1/3" High-Performance CMOS
Max 2.0 MP(1920x1080) Full HD
Built in Fixed Lens 2.8mm or 3.6mm
True Day/Night, Smart IR, Up to 30m
3D DNR, UTC Control, DWDR, Sens Up
Motion Detection, Privacy Zone, ICR
Protection Category IP-54 Standard

C Series : High-Performance CMOS & DSP

P Series : Sony CMOS Sensor



**PHC-C6220
PHC-P6220**

2MP LED IR DOME CAMERA

1/3" High-Performance CMOS
Max 2.0 MP(1920x1080) Full HD
Built in Fixed Lens 2.8mm or 3.6mm
True Day/Night, Smart IR, Up to 30m
3D DNR, UTC Control, DWDR, Sens Up
Motion Detection, Privacy Zone, ICR
Weather Proof IP-66 Standard

C Series : High-Performance CMOS & DSP

P Series : Sony CMOS Sensor



**PHC-C6223
PHC-P6223**

2MP LED IR DOME CAMERA

1/3" High-Performance CMOS
Max 2.0 MP(1920x1080) Full HD
Built in Fixed Lens 2.8mm or 3.6mm
True Day/Night, Smart IR Up to 20m
3D DNR, UTC Control, DWDR, Sens Up
Motion Detection, Privacy Zone, ICR
Weather Proof IP-66 Standard

C Series : High-Performance CMOS & DSP

P Series : Sony CMOS Sensor



**PHC-C6224
PHC-P6224**

2MP LED IR DOME CAMERA

1/3" High-Performance CMOS
Max 2.0 MP(1920x1080) Full HD
Built in Fixed Lens 2.8mm or 3.6mm
True Day/Night, Smart IR Up to 40m
3D DNR, UTC Control, DWDR, Sens Up
Motion Detection, Privacy Zone, ICR
Weather Proof IP-66 Standard

C Series : High-Performance CMOS & DSP

P Series : Sony CMOS Sensor

2 MEGA PIXEL FIXED LENS TURBO HD CAMERA



**PHC-C4220
PHC-P4220**

2MP LED IR BULLET CAMERA

1/3" High-Performance CMOS
Max 2.0 MP(1920x1080) Full HD
Built in Fixed Lens 2.8mm or 3.6mm
True Day/Night, Smart IR, Up to 30m
3D DNR, UTC Control, DWDR, Sens Up
Motion Detection, Privacy Zone, ICR
Weather Proof IP-66 Standard

C Series : High-Performance CMOS & DSP

P Series : Sony CMOS Sensor



**PHC-C4224
PHC-P4224**

2MP LED IR BULLET CAMERA

1/3" High-Performance CMOS
Max 2.0 MP(1920x1080) Full HD
Built in Fixed Lens 2.8mm or 3.6mm
True Day/Night, Smart IR, Up to 30m
3D DNR, UTC Control, DWDR, Sens Up
Motion Detection, Privacy Zone, ICR
Weather Proof IP-66 Standard

C Series : High-Performance CMOS & DSP

P Series : Sony CMOS Sensor



**PHC-C4223
PHC-P4223**

2MP LED IR BULLET CAMERA

1/3" High-Performance CMOS
Max 2.0 MP(1920x1080) Full HD
Built in Fixed Lens 2.8mm or 3.6mm
True Day/Night, Smart IR, Up to 30m
3D DNR, UTC Control, DWDR, Sens Up
Motion Detection, Privacy Zone, ICR
Weather Proof IP-66 Standard

C Series : High-Performance CMOS & DSP

P Series : Sony CMOS Sensor



**PHC-C4226A
PHC-P4226A**

2MP LED IR BULLET CAMERA

1/3" High-Performance CMOS
Max 2.0 MP(1920x1080) Full HD
Built in Fixed Lens 2.8mm or 3.6mm
True Day/Night, Smart IR, Up to 60m
3D DNR, UTC Control, DWDR, Sens Up
Motion Detection, Privacy Zone, ICR
Weather Proof IP-66 Standard

C Series : High-Performance CMOS & DSP

P Series : Sony CMOS Sensor

2 MEGAPIXEL FIXED LENS TURBO HD CAMERA



PHC-C2225W
PHC-C2225AW

2MP WARM LIGHT DOME CAMERA

1/3" High-Performance CMOS
Max 2.0 MP(1920x1080) Full HD
Built in Star Light Lens 2.8mm or 3.6mm
24/7 Color Imaging (Warm Light)
Built in OSRAM LED, Up to 20m
3D DNR, UTC Control, DWDR, Sens Up
Motion Detection, Privacy Zone, IP-54

A : Support Audio & Built in Microphone
C Series : High-Performance CMOS & DSP



PHC-C6225W
PHC-S6225W

2MP WARM LIGHT DOME CAMERA

1/3" High-Performance CMOS
Max 2.0 MP(1920x1080) Full HD
Built in Star Light Lens 2.8mm or 3.6mm
24/7 Color Imaging (Warm Light)
Built in OSRAM LED, Up to 20m
3D DNR, UTC Control, DWDR, Sens Up
Motion Detection, Privacy Zone, IP-66

C Series : High-Performance CMOS & DSP
S Series : Sony CMOS & Star Light



PHC-C6225D
PHC-S6225D

2MP DUAL LIGHT DOME CAMERA

1/3" High-Performance CMOS
Max 2.0 MP(1920x1080) Full HD
Built in Star Light Lens 2.8mm or 3.6mm
Dual Light Technology (IR LED & Warm Light)
Up to 20m Warm Light, Up to 30m Smart IR
3D DNR, UTC Control, DWDR, Sens Up
Motion Detection, Privacy Zone, IP-66

C Series : High-Performance CMOS & DSP
S Series : Sony CMOS & Star Light



PHC-C6220W
PHC-S6220W

2MP WARM LIGHT DOME CAMERA

1/3" High-Performance CMOS
Max 2.0 MP(1920x1080) Full HD
Built in Star Light Lens 2.8mm or 3.6mm
24/7 Color Imaging (Warm Light) Up to 30m
3D DNR, UTC Control, DWDR, Sens Up
Motion Detection, Privacy Zone
Weather Proof IP-66 Standard

C Series : High-Performance CMOS & DSP
S Series : Sony CMOS & Star Light

2 MEGAPIXEL FIXED LENS TURBO HD CAMERA



PHC-C4220W
PHC-C4220AW

2MP WARM LIGHT BULLET CAMERA

1/3" High-Performance CMOS
Max 2.0 MP(1920x1080) Full HD
Built in Star Light Lens 2.8mm or 3.6mm
24/7 Color Imaging (Warm Light)
Up to 20m IR Distance
3D DNR, UTC Control, DWDR, Sens Up
Motion Detection, Privacy Zone, IP-66

A : Support Audio & Built in Microphone
C Series : High-Performance CMOS & DSP



PHC-C4224W
PHC-S4224W

2MP WARM LIGHT BULLET CAMERA

1/3" High-Performance CMOS
Max 2.0 MP(1920x1080) Full HD
Built in Star Light Lens 2.8mm or 3.6mm
24/7 Color Imaging (Warm Light) Up to 20m
3D DNR, UTC Control, DWDR, Sens Up
Motion Detection, Privacy Zone
Weather Proof IP-66 Standard

C Series : High-Performance CMOS & DSP
S Series : Sony CMOS & Star Light



PHC-C4225D
PHC-S4225D

2MP DUAL LIGHT BULLET CAMERA

1/3" High-Performance CMOS
Max 2.0 MP(1920x1080) Full HD
Built in Star Light Lens 2.8mm or 3.6mm
Dual Light Technology (IR LED & Warm Light)
Up to 20m Warm Light, Up to 30m Smart IR
3D DNR, UTC Control, DWDR, Sens Up
Motion Detection, Privacy Zone, IP-66

C Series : High-Performance CMOS & DSP
S Series : Sony CMOS & Star Light



PHC-C4228W
PHC-S4228W

2MP WARM LIGHT BULLET CAMERA

1/3" High-Performance CMOS
Max 2.0 MP(1920x1080) Full HD
Built in Star Light Lens 2.8mm or 3.6mm
24/7 Color Imaging (Warm Light) Up to 30m
3D DNR, UTC Control, DWDR, Sens Up
Motion Detection, Privacy Zone
Weather Proof IP-66 Standard

C Series : High-Performance CMOS & DSP
S Series : Sony CMOS & Star Light

5 MEGA PIXEL FIXED LENS TURBO HD CAMERA



PHC-P2525W

5MP WARM LIGHT DOME CAMERA

1/3" High-Performance Sony CMOS
Max 5.0 MP (2560x1920) Resolution
Built in Star Light Lens 2.8mm or 3.6mm
24/7 Color Imaging (Warm Light)
Built in OSRAM LED, Up to 20m
3D DNR, UTC Control, DWDR, Sens Up
Motion Detection, Privacy Zone
Protection Category IP-54 Standard
P Series : Sony CMOS Sensor



PHC-P6525W

5MP WARM LIGHT DOME CAMERA

1/3" High-Performance Sony CMOS
Max 5.0 MP (2560x1920) Resolution
Built in Star Light Lens 2.8mm or 3.6mm
24/7 Color Imaging (Warm Light)
Built in OSRAM LED, Up to 20m
3D DNR, UTC Control, DWDR, Sens Up
Motion Detection, Privacy Zone
Weather Proof IP-66 Standard
P Series : Sony CMOS Sensor



PHC-P6520W

5MP WARM LIGHT DOME CAMERA

1/3" High-Performance Sony CMOS
Max 5.0 MP (2560x1920) Resolution
Built in Star Light Lens 2.8mm or 3.6mm
24/7 Color Imaging (Warm Light)
Up to 30m Warm Light Distance
3D DNR, UTC Control, DWDR, Sens Up
Motion Detection, Privacy Zone
Weather Proof IP-66 Standard
P Series : Sony CMOS Sensor



PHC-P6520

5MP LED IR DOME CAMERA

1/3" High-Performance Sony CMOS
Max 5.0 MP (2560x1920) Resolution
Built in Star Light Lens 2.8mm or 3.6mm
True Day/Night, Smart IR
Up to 30m IR Distance
3D DNR, UTC Control, DWDR, Sens Up
Motion Detection, Privacy Zone, ICR
Weather Proof IP-66 Standard
P Series : Sony CMOS Sensor

5 MEGA PIXEL FIXED LENS TURBO HD CAMERA



PHC-P4522W

5MP WARM LIGHT BULLET CAMERA

1/3" High-Performance Sony CMOS
Max 5.0 MP (2560x1920) Resolution
Built in Star Light Lens 2.8mm or 3.6mm
24/7 Color Imaging (Warm Light)
Up to 20m Warm Light Distance
3D DNR, UTC Control, DWDR, Sens Up
Motion Detection, Privacy Zone
Weather Proof IP-66 Standard
P Series : Sony CMOS Sensor



PHC-P4528W

5MP WARM LIGHT BULLET CAMERA

1/3" High-Performance Sony CMOS
Max 5.0 MP (2560x1920) Resolution
Built in Star Light Lens 2.8mm or 3.6mm
24/7 Color Imaging (Warm Light)
Up to 30m Warm Light Distance
3D DNR, UTC Control, DWDR, Sens Up
Motion Detection, Privacy Zone
Weather Proof IP-66 Standard
P Series : Sony CMOS Sensor



PHC-P4529W

5MP WARM LIGHT BULLET CAMERA

1/3" High-Performance Sony CMOS
Max 5.0 MP (2560x1920) Resolution
Built in Star Light Lens 2.8mm or 3.6mm
24/7 Color Imaging (Warm Light)
Up to 30m Warm Light Distance
3D DNR, UTC Control, DWDR, Sens Up
Motion Detection, Privacy Zone
Weather Proof IP-66 Standard
P Series : Sony CMOS Sensor



PHC-P4523

5MP LED IR BULLET CAMERA

1/3" High-Performance Sony CMOS
Max 5.0 MP (2560x1920) Resolution
Built in Star Light Lens 2.8mm or 3.6mm
True Day/Night, Smart IR
Up to 30m IR Distance
3D DNR, UTC Control, DWDR, Sens Up
Motion Detection, Privacy Zone, ICR
Weather Proof IP-66 Standard
P Series : Sony CMOS Sensor

3 MEGA PIXEL PTZ WIFI CAMERA



PNC-H5320

3MP LED IR PTZ WIFI CAMERA

1/3" High-Performance CMOS
Max 3.0 MP(2048x1536) Full HD
Built in Fixed lens 2.8m
True Day/Night, Smart IR, Up to 15m
Auto Tracking and Face Detection
2 Way Audio & P2P
H.265, 3D DNR, DWDR, ONVIF
Protection Category IP-54 Standard
H Series : High-Performance CMOS & DSP



PNC-H5320W

3MP WARM LIGHT PTZ WIFI CAMERA

1/3" High-Performance CMOS
Max 3.0 MP(2048x1536) Full HD
Built in Fixed lens 2.8m
24/7 Color Imaging (Warm Light) Up to 15m
Auto Tracking and Face Detection
2 Way Audio & P2P
H.265, 3D DNR, DWDR, ONVIF
Protection Category IP-54 Standard
H Series : High-Performance CMOS & DSP



PHC-P6230

2MP LED IR VARI FOCAL DOME CAMERA

1/3" High-Performance CMOS
Max 2.0 MP(1920x1080) Full HD
Built in Vari Focal Lens (2.8mm~12mm)
True Day/Night, Smart IR
Up to 40m IR Distance
3D DNR, UTC Control, DWDR, Sens Up
Motion Detection, Privacy Zone
Weather Proof IP-66 Standard
P Series : Sony CMOS Sensor



PHC-C4230W
PHC-S4230W

2MP WARM LIGHT MOTORIZED BULLET CAMERA

1/3" High-Performance Sony CMOS
Max 2.0 MP(1920x1080) Full HD
Built in Motorize Lens (2.8mm~12mm)
24/7 Color Imaging (Warm Light), Up to 30m
3D DNR, UTC Control, DWDR, Sens Up
Motion Detection, Privacy Zone
Weather Proof IP-66 Standard
C Series : High-Performance CMOS & DSP
S Series : Sony CMOS & Star Light

DIGITAL VIDEO RECORDER (XVR) & SPEED DOME



PHS-4504U

4 + 2 CH. / 5 MP RECORDER (XVR)

4 Channel BNC Interface (75Ω)
H.265 / H.264 Compression
Connect to HD-TVI,CVI,AHD,Analog
Support 2 Channel IP Cameras
Up to 5MP Resolution Recording
Motion Detection & Video Tampering
Support Audio Over Coaxial Cable
Support P2P, Support 1 HDD Up to 6 TB
U Series : Manufactured by UNI Co.



PHS-4508U

8 + 4 CH. / 5 MP RECORDER (XVR)

8 Channel BNC Interface (75Ω)
H.265 / H.264 Compression
Connect to HD-TVI,CVI,AHD,Analog
Support 4 Channel IP Cameras
Up to 5MP Resolution Recording
Motion Detection & Video Tampering
Support Audio Over Coaxial Cable
Support P2P, Support 1 HDD Up to 6 TB
U Series : Manufactured by UNI Co.



PHS-4516U

16 + 8 CH. / 5 MP RECORDER (XVR)

16 Channel BNC Interface (75Ω)
H.265 / H.264 Compression
Connect to HD-TVI,CVI,AHD,Analog
Support 8 Channel IP Cameras
Up to 5MP Resolution Recording
Motion Detection & Video Tampering
Support Audio Over Coaxial Cable
Support P2P, Support 1 HDD Up to 6 TB
U Series : Manufactured by UNI Co.



PHC-P3250

2MP LED IR SPEED DOME CAMERA

1/3" High-Performance CMOS
Max 2.0 MP(1920x1080) Full HD
Built in 20X Optical zoom (4.7- 94mm Lens)
True Day/Night, Smart IR, Up to 80m
Max Speed : 240°/S
3D DNR, UTC Control, DWDR, Sens Up
Motion Detection, Privacy Zone, ICR
Weather Proof IP-66 Standard
P Series : Sony CMOS Sensor

3 MEGA PIXEL FIXED LENS NETWORK CAMERA



PNC-C2325W

3MP WARM LIGHT DOME CAMERA

1/3" High-Performance CMOS
Max 3.0 MP(2048x1536) Resolution
Built in Star Light Lens 2.8mm or 3.6mm
24/7 Color Imaging (Warm Light)
Built in OSRAM LED, Up to 20m
H.265, 3D DNR, DWDR, ONVIF, PoE
Audio Line Input
Protection Category IP-54 Standard

C Series : High-Performance CMOS & DSP



PNC-C6325W

3MP WARM LIGHT DOME CAMERA

1/3" High-Performance CMOS
Max 3.0 MP(2048x1536) Resolution
Built in Star Light Lens 2.8mm or 3.6mm
24/7 Color Imaging (Warm Light)
Built in OSRAM LED, Up to 20m
H.265, 3D DNR, DWDR, ONVIF, PoE
Audio Line Input
Weather Proof IP-66 Standard

C Series : High-Performance CMOS & DSP



PNC-C6320W

3MP WARM LIGHT DOME CAMERA

1/3" High-Performance CMOS
Max 3.0 MP(2048x1536) Resolution
Built in Star Light Lens 2.8mm or 3.6mm
24/7 Color Imaging (Warm Light)
Up to 30m Warm Light Distance
H.265, 3D DNR, DWDR, ONVIF, PoE
Audio Line Input
Weather Proof IP-66 Standard

C Series : High-Performance CMOS & DSP



PNC-C6320

3MP LED IR DOME CAMERA

1/3" High-Performance CMOS
Max 3.0 MP(2048x1536) Resolution
Built in Star Light Lens 2.8mm or 3.6mm
True Day/Night, Smart IR
Up to 30m IR Distance
H.265, 3D DNR, DWDR, ONVIF, PoE
Audio Line Input
Weather Proof IP-66 Standard

C Series : High-Performance CMOS & DSP

3 MEGA PIXEL FIXED LENS NETWORK CAMERA



PNC-C4323W

3MP WARM LIGHT BULLET CAMERA

1/3" High-Performance CMOS
Max 3.0 MP(2048x1536) Resolution
Built in Star Light Lens 2.8mm or 3.6mm
24/7 Color Imaging (Warm Light)
Up to 20m Warm Light Distance
H.265, 3D DNR, DWDR, ONVIF, PoE
Audio Line Input
Weather Proof IP-66 Standard

C Series : High-Performance CMOS & DSP



PNC-C4328W

3MP WARM LIGHT BULLET CAMERA

1/3" High-Performance CMOS
Max 3.0 MP(2048x1536) Resolution
Built in Star Light Lens 2.8mm or 3.6mm
24/7 Color Imaging (Warm Light)
Up to 30m Warm Light Distance
H.265, 3D DNR, DWDR, ONVIF, PoE
Audio Line Input
Weather Proof IP-66 Standard

C Series : High-Performance CMOS & DSP



PNC-C4329W

3MP WARM LIGHT BULLET CAMERA

1/3" High-Performance CMOS
Max 3.0 MP(2048x1536) Resolution
Built in Star Light Lens 2.8mm or 3.6mm
24/7 Color Imaging (Warm Light)
Up to 30m Warm Light Distance
H.265, 3D DNR, DWDR, ONVIF, PoE
Audio Line Input
Weather Proof IP-66 Standard

C Series : High-Performance CMOS & DSP



PNC-C4323

3MP LED IR BULLET CAMERA

1/3" High-Performance CMOS
Max 3.0 MP(2048x1536) Resolution
Built in Star Light Lens 2.8mm or 3.6mm
True Day/Night, Smart IR
Up to 30m IR Distance
H.265, 3D DNR, DWDR, ONVIF, PoE
Audio Line Input
Weather Proof IP-66 Standard

C Series : High-Performance CMOS & DSP

5 MEGA PIXEL FIXED LENS NETWORK CAMERA



PNC-P2525W

5MP WARM LIGHT AI DOME CAMERA

1/3" High-Performance Sony CMOS
Max 5.0 MP(2560x1920) Resolution
Built in Star Light Lens 2.8mm or 3.6mm
24/7 Color Imaging (Warm Light)
Built in OSRAM LED, Up to 20m
H.265, 3D DNR, DWDR, ONVIF, PoE
Face & Intrusion Detection, Pepole Counting
Audio-In, IP-54 Standard
P Series : Sony CMOS Sensor



PNC-P6525W

5MP WARM LIGHT AI DOME CAMERA

1/3" High-Performance Sony CMOS
Max 5.0 MP(2560x1920) Resolution
Built in Star Light Lens 2.8mm or 3.6mm
24/7 Color Imaging (Warm Light)
Built in OSRAM LED, Up to 20m
H.265, 3D DNR, DWDR, ONVIF, PoE
Face & Intrusion Detection, Pepole Counting
Audio-In, IP-66 Standard
P Series : Sony CMOS Sensor



PNC-P6520W

5MP WARM LIGHT AI DOME CAMERA

1/3" High-Performance Sony CMOS
Max 5.0 MP(2560x1920) Resolution
Built in Star Light Lens 2.8mm or 3.6mm
24/7 Color Imaging (Warm Light)
Up to 30m Warm Light Distance
H.265, 3D DNR, DWDR, ONVIF, PoE
Face & Intrusion Detection, Pepole Counting
Audio-In, IP-66 Standard
P Series : Sony CMOS Sensor



PNC-P6520

5MP LED IR AI DOME CAMERA

1/3" High-Performance Sony CMOS
Max 5.0 MP(2560x1920) Resolution
Built in Star Light Lens 2.8mm or 3.6mm
True Day/Night, Smart IR
Up to 30m IR Distance
H.265, 3D DNR, DWDR, ONVIF, PoE
Face & Intrusion Detection, Pepole Counting
Audio-In, IP-66 Standard
P Series : Sony CMOS Sensor

5 MEGA PIXEL FIXED LENS NETWORK CAMERA



PNC-P4523W

5MP WARM LIGHT AI BULLET CAMERA

1/3" High-Performance Sony CMOS
Max 5.0 MP(2560x1920) Resolution
Built in Star Light Lens 2.8mm or 3.6mm
24/7 Color Imaging (Warm Light)
Up to 20m Warm Light Distance
H.265, 3D DNR, DWDR, ONVIF, PoE
Face & Intrusion Detection, Pepole Counting
Audio-In, IP-66 Standard
P Series : Sony CMOS Sensor



PNC-P4528W

5MP WARM LIGHT AI BULLET CAMERA

1/3" High-Performance Sony CMOS
Max 5.0 MP(2560x1920) Resolution
Built in Star Light Lens 2.8mm or 3.6mm
24/7 Color Imaging (Warm Light)
Up to 30m Warm Light Distance
H.265, 3D DNR, DWDR, ONVIF, PoE
Face & Intrusion Detection, Pepole Counting
Audio-In, IP-66 Standard
P Series : Sony CMOS Sensor



PNC-P4529W

5MP WARM LIGHT AI BULLET CAMERA

1/3" High-Performance Sony CMOS
Max 5.0 MP(2560x1920) Resolution
Built in Star Light Lens 2.8mm or 3.6mm
24/7 Color Imaging (Warm Light)
Up to 30m Warm Light Distance
H.265, 3D DNR, DWDR, ONVIF, PoE
Face & Intrusion Detection, Pepole Counting
Audio-In, IP-66 Standard
P Series : Sony CMOS Sensor



PNC-P4523

5MP LED IR AI BULLET CAMERA

1/3" High-Performance Sony CMOS
Max 5.0 MP(2560x1920) Resolution
Built in Star Light Lens 2.8mm or 3.6mm
True Day/Night, Smart IR
Up to 30m IR Distance
H.265, 3D DNR, DWDR, ONVIF, PoE
Face & Intrusion Detection, Pepole Counting
Audio-In, IP-66 Standard
P Series : Sony CMOS Sensor

2,4,5 MEGA PIXEL FIXED LENS NETWORK CAMERA



PNC-U6226

2MP LED IR DOME CAMERA

1/2.8" High-Performance CMOS
Max 2.0 MP(1920x1080) Resolution
Built in Fixed Lens 2.8mm
True Day/Night, Smart IR, Up to 30m
Line Crossing, Intrusion Detection
ULTRA H.265, 3D DNR, ROI,HLC, ICR
Anti Vandal, Digital WDR, ONVIF, PoE
Weather Proof IP-67 Standard

U Series : Manufactured by UNI Co.



PNC-U6226W

2MP WARM LIGHT DOME CAMERA

1/2.8" High-Performance CMOS
Max 2.0 MP(1920x1080) Resolution
Built in Fixed Lens 2.8mm
24/7 Color Imaging (Warm Light) Up to 30m
Line Crossing, Intrusion Detection
ULTRA H.265, 3D DNR, ROI,HLC
Built-in Mic, WDR, ONVIF, PoE
Weather Proof IP-67 Standard

U Series : Manufactured by UNI Co.



PNC-U6426

4MP LED IR DOME CAMERA

1/3" High-Performance CMOS
Max 4.0 MP(2688x1520) Resolution
Built in Fixed Lens 2.8mm
True Day/Night, Smart IR, Up to 50m
Line Crossing, Intrusion Detection
ULTRA H.265, 3D DNR, ROI,HLC, ICR
Built-in Mic, WDR, ONVIF, PoE
Weather Proof IP-67 Standard

U Series : Manufactured by UNI Co.



PNC-U6526

5MP LED IR DOME CAMERA

1/2.8" High-Performance CMOS
Max 5.0 MP(2592x1944) Resolution
Built in Fixed Lens 2.8mm
True Day/Night, Smart IR, Up to 50m
Line Crossing, Intrusion Detection
ULTRA H.265, 3D DNR, ROI,HLC, ICR
Anti Vandal, Built-in Mic, WDR, ONVIF, PoE
Weather Proof IP-67 Standard

U Series : Manufactured by UNI Co.

2,4,5 MEGA PIXEL FIXED LENS NETWORK CAMERA



PNC-U4226

2MP LED IR BULLET CAMERA

1/2.8" High-Performance CMOS
Max 2.0 MP(1920x1080) Resolution
Built in Fixed Lens 4.0mm
True Day/Night, Smart IR, Up to 30m
Line Crossing, Intrusion Detection
ULTRA H.265, 3D DNR, ROI,HLC, ICR
Digital WDR, ONVIF, PoE
Weather Proof IP-67 Standard

U Series : Manufactured by UNI Co.



PNC-U4226W

2MP WARM LIGHT BULLET CAMERA

1/2.8" High-Performance CMOS
Max 2.0 MP(1920x1080) Resolution
Built in Fixed Lens 4.0mm
24/7 Color Imaging (Warm Light) Up to 30m
Line Crossing, Intrusion Detection
ULTRA H.265, 3D DNR, ROI,HLC
Built-in Mic, WDR, ONVIF, PoE
Weather Proof IP-67 Standard

U Series : Manufactured by UNI Co.



PNC-U4426

4MP LED IR BULLET CAMERA

1/3" High-Performance CMOS
Max 4.0 MP(2688x1520) Resolution
Built in Fixed Lens 4.0mm
True Day/Night, Smart IR, Up to 50m
Line Crossing, Intrusion Detection
ULTRA H.265, 3D DNR, ROI,HLC, ICR
Built-in Mic, WDR, ONVIF, PoE
Weather Proof IP-67 Standard

U Series : Manufactured by UNI Co.



PNC-U4526

5MP LED IR BULLET CAMERA

1/2.8" High-Performance CMOS
Max 5.0 MP(2592x1944) Resolution
Built in Fixed Lens 4.0mm
True Day/Night, Smart IR, Up to 50m
Line Crossing, Intrusion Detection
ULTRA H.265, 3D DNR, ROI,HLC, ICR
Built-in Mic, WDR, ONVIF, PoE
Weather Proof IP-67 Standard

U Series : Manufactured by UNI Co.

2 MEGA PIXEL PTZ WIFI CAMERA



PNC-U5220

2MP LED IR PTZ WIFI CAMERA
 1/1.8" High-Performance CMOS
 Max 2.0 MP(1920x1080) Resolution
 Built in Fixed lens 2.8m
 True Day/Night, Smart IR, Up to 15m
 Auto Tracking and Face Detection
 2 Way Audio & P2P, ULTRA H.265, 3D DNR
 Micro SD, WDR, ONVIF
 Protection Category IP-54 Standard
U Series : Manufactured by UNI Co.

2 MEGA PIXEL SPEED DOME NETWORK CAMERA



PNC-U3250

2MP LIGHT HUNTER SPEED DOME CAMERA
 1/2.7" High-Performance CMOS
 Max 2.0 MP(1920x1080) Full HD
 Built in 4X Digital zoom (2.8~12mm Lens)
 24/7 Color Imaging (Color Hunter) Up to 50m
 Intelligent Analysis, Active Defense
 Auto Tracking, Humanoid Recognition
 ULTRA H.265, 3D DNR, ROI, HLC, IP-67
 Built-in Mic, Micro SD, WDR, ONVIF, PoE
U Series : Manufactured by UNI Co.



PNC-U3256

2MP LED IR SPEED DOME CAMERA
 1/2.8" High-Performance CMOS
 Max 2.0 MP(1920x1080) Full HD
 Built in 25X Optical zoom (5~125mm Lens)
 True Day/Night, Smart IR, Up to 150m
 Intelligent Analysis, Active Defense
 Auto Tracking, Humanoid Recognition
 ULTRA H.265, 3D DNR, ROI, HLC, IP-67
 Audio In/Out, Micro SD, WDR, ONVIF, PoE
U Series : Manufactured by UNI Co.



PNC-U3456

4MP LED IR SPEED DOME CAMERA
 1/1.8" High-Performance CMOS
 Max 4.0 MP(2688x1520) Full HD
 Built in 40X Optical zoom (5.7~228mm Lens)
 True Day/Night, Smart IR, Up to 250m
 Intelligent Analysis, Active Defense
 Auto Tracking, Humanoid Recognition
 ULTRA H.265, 3D DNR, ROI, HLC, IP-67
 Audio In/Out, Micro SD, WDR, ONVIF, PoE
U Series : Manufactured by UNI Co.

5 MEGA PIXEL MOTORIZED NETWORK CAMERA



PNC-U6556

5MP LED IR DOME CAMERA
 1/2.8" High-Performance CMOS
 Max 5.0 MP(2880x1620) Resolution
 Built in Motorize Lens 2.8mm~12mm
 True Day/Night, Smart IR, Up to 40m
 Line Crossing, Intrusion Detection
 ULTRA H.265, 3D DNR, ROI, HLC, ICR
 Built-in Mic, Micro SD, WDR, ONVIF, PoE
 Weather Proof IP-67 Standard
U Series : Manufactured by UNI Co.



PNC-U4556

5MP LED IR BULLET CAMERA
 1/2.8" High-Performance CMOS
 Max 5.0 MP(2880x1620) Resolution
 Built in Motorize Lens 2.8mm~12mm
 True Day/Night, Smart IR, Up to 40m
 Line Crossing, Intrusion Detection
 ULTRA H.265, 3D DNR, ROI, HLC, ICR
 Built-in Mic, Micro SD, WDR, ONVIF, PoE
 Weather Proof IP-67 Standard
U Series : Manufactured by UNI Co.



PNC-U6826W

8MP COLOR HUNTER DOME CAMERA
 1/1.8" High-Performance CMOS
 Max 8.0 MP(3840x2160) Resolution
 Built in Fixed Lens 4mm
 24/7 Color Imaging (Color Hunter) Up to 30m
 Line Crossing, Intrusion Detection
 ULTRA H.265, 3D DNR, ROI, HLC
 Built-in Mic, Micro SD, WDR, ONVIF, PoE
 Weather Proof IP-67 Standard
U Series : Manufactured by UNI Co.



PNC-U4826

8MP LED IR BULLET CAMERA
 1/1.8" High-Performance CMOS
 Max 8.0 MP(3840x2160) Resolution
 Built in Fixed Lens 4mm
 True Day/Night, Smart IR, Up to 80m
 Line Crossing, Intrusion Detection
 People Counting, Built-in Heater
 ULTRA H.265, WDR, 3D DNR, ROI, HLC
 Built-in Mic, Micro SD, ONVIF, PoE, IP-67
U Series : Manufactured by UNI Co.

NETWORK VIDEO RECORDER



PNS-5508

8 CH. / 5 MP NETWORK RECORDER

8 Camera Can Be Connected
Connected to 5.0MP Resolution
H.265 / H.264 Compression
Easy To Operate And Run Smoothly
Support Intelligent Coding VSMart
Support Intelligent & Human Detection
Audio Input / Output Through HDMI
Support HDMI & VGA Output
Support 1 HDD Up to 10 TB



PNS-5516

16 CH. / 5 MP NETWORK RECORDER

16 Camera Can Be Connected
Connected to 5.0MP Resolution
H.265 / H.264 Compression
Easy To Operate And Run Smoothly
Support Intelligent Coding VSMart
Support Intelligent & Human Detection
Audio Input / Output Through HDMI
Support HDMI & VGA Output
Support 1 HDD Up to 10 TB



PNS-5532

32 CH. / 5 MP NETWORK RECORDER

32 Camera Can Be Connected
Connected to 5.0MP Resolution
H.265 / H.264 Compression
Easy To Operate And Run Smoothly
Support Intelligent Coding VSMart
Support Intelligent & Human Detection
Audio Input / Output Through HDMI
Support HDMI (4K) & VGA Output
Support 2 HDD Up to 8 TB



PNS-5564

64 CH. / 5 MP NETWORK RECORDER

64 Camera Can Be Connected
Connected to 5.0MP Resolution
H.265 / H.264 Compression
Easy To Operate And Run Smoothly
Support Intelligent Coding VSMart
Support Intelligent & Human Detection
Audio Input / Output Through HDMI
Support HDMI & VGA Output
Support 8 HDD Up to 6 TB

NETWORK VIDEO RECORDER



PNS-5808U

8 CH. / 4K NETWORK RECORDER

8 Camera Can Be Connected
Support Ultra265/H.265/H.264 video formats
HDMI and VGA simultaneous output
Up to 8 Megapixels resolution recording
Accurate retrieval, instant playback
1 SATA, up to 6TB for each HDD
ANR technology to enhance the storage reliability when the network is disconnected
U Series : Manufactured by UNI Co.



PNS-5816U

16 CH. / 4K NETWORK RECORDER

16 Camera Can Be Connected
Support Ultra265/H.265/H.264 video formats
HDMI and VGA simultaneous output
Up to 8 Megapixels resolution recording
Accurate retrieval, instant playback
1 SATA, up to 6TB for each HDD
ANR technology to enhance the storage reliability when the network is disconnected
U Series : Manufactured by UNI Co.



**PNS-5832U2
PNS-5832U4**

32 CH. / 4K NETWORK RECORDER

32 Camera Can Be Connected
Support Ultra265/H.265/H.264 video formats
HDMI and VGA simultaneous output
Up to 8 Megapixels resolution recording
Accurate retrieval, instant playback
U2: 2 SATA, U4: 4 SATA, (Up to 6TB)
ANR technology to enhance the storage reliability when the network is disconnected
U Series : Manufactured by UNI Co.



PNS-5864U8

64 CH. / 4K NETWORK RECORDER

64 Camera Can Be Connected
Support Ultra265/H.265/H.264 video formats
Support RAID 0, 1, 5, 6, 10 & 2 HDMI (4K)
Up to 8 Megapixels resolution recording
Support 2-ch HDMI (4K), 1-ch VGA
8 SATA, up to 10TB for each HDD
ANR technology to enhance the storage reliability when the network is disconnected
U Series : Manufactured by UNI Co.

NETWORK SWITCHES



AIPs-O420-P

4PORT 10/100Mbps PoE SWITCH

4x10/100Mbps PoE RJ45 port
2x10/100Mbps RJ45 port uplink
250 Meters long distance power supply
Should be use cat5e or cat6 cable
Bandwidth : 1.2Gbps
5 Working Modes : Standard,AI VLAN,
AI Extend, AI PoE, AI QoS
Max power for single port 30W, External 60W
Support IEEE802.3af/at standard



AIPs-O820-P

8PORT 10/100Mbps PoE SWITCH

8x10/100Mbps PoE RJ45 port
2x10/100Mbps RJ45 port uplink
250 Meters long distance power supply
Should be use cat5e or cat6 cable
Bandwidth : 2Gbps
5 Working Modes : Standard,AI VLAN,
AI Extend, AI PoE, AI QoS
Max power for single port 30W, External 96W
Support IEEE802.3af/at standard



AIPs-I621-P

16PORT 10/100Mbps PoE SWITCH

16x10/100Mbps PoE RJ45 port
1 Gigabit combo,1 Gigabit ethernet RJ45 port
250 Meters long distance power supply
Should be use cat5e or cat6 cable
Bandwidth : 7.2Gbps
5 Working Modes : Standard,AI VLAN,
AI Extend, AI PoE, AI QoS
Max power for single port 30W, External 96W
Support IEEE802.3af/at standard



AIPs-2421-P

24PORT 10/100Mbps PoE SWITCH

24x10/100Mbps PoE RJ45 port
1x10/100/1000Mbps RJ45 port uplink
1 Gigabit combo port
250 Meters long distance power supply
Should be use cat5e or cat6 cable
Bandwidth : 8.8Gbps
5 Working Modes : Standard,AI VLAN,
AI Extend, AI PoE, AI QoS
Max power for single port 250W, External 96W
Support IEEE802.3af/at standard

NETWORK SWITCHES



AIPs-O420-PG

4PORT 10/100/1000Mbps PoE SWITCH

4x10/100/1000Mbps PoE RJ45 port
2x10/100/1000Mbps RJ45 port uplink
250 Meters long distance power supply
Should be use cat5e or cat6 cable
Bandwidth : 12Gbps
5 Working Modes : Standard,AI VLAN,
AI Extend, AI PoE, AI QoS
Max power for single port 30W, External 60W
Support IEEE802.3af/at standard



AIPs-O820-PG

8PORT 10/100/1000Mbps PoE SWITCH

8x10/100/1000Mbps PoE RJ45 port
2x10/100/1000Mbps RJ45 port uplink
250 Meters long distance power supply
Should be use cat5e or cat6 cable
Bandwidth : 20Gbps
5 Working Modes : Standard,AI VLAN,
AI Extend, AI PoE, AI QoS
Max power for single port 30W, External 96W
Support IEEE802.3af/at standard



AIPs-I602-PG

16PORT 10/100/1000Mbps PoE SWITCH

16x10/100/1000Mbps PoE RJ45 port
2 Gigabit SFP port
250 Meters long distance power supply
Should be use cat5e or cat6 cable
Bandwidth : 36Gbps
5 Working Modes : Standard,AI VLAN,
AI Extend, AI PoE, AI QoS
Max power for single port 30W, External 96W
Support IEEE802.3af/at standard



AIPs-2402-PG

24PORT 10/100/1000Mbps PoE SWITCH

24x10/100/1000Mbps PoE RJ45 port
2 Gigabit SFP port
250 Meters long distance power supply
Should be use cat5e or cat6 cable
Bandwidth : 52Gbps
5 Working Modes : Standard,AI VLAN,
AI Extend, AI PoE, AI QoS
Max power for single port 30W, External 96W
Support IEEE802.3af/at standard

NETWORK SWITCHES



PS-0800-N

8PORT 10/100/1000Mbps SWITCH

8x10/100/1000Mbps RJ45 port
 Bandwidth : 16Gbps
 Input power: 100-240V,50/60Hz
 Output power: 12VDC ,0.5A
 Support IEEE802.3af/at standard



PS-2400-N

24PORT 10/100/1000Mbps SWITCH

24x10/100/1000Mbps RJ45 port
 Bandwidth : 48Gbps
 Input power: 100-240V,50/60Hz
 Output power: 12VDC ,0.5A
 Support IEEE802.3af/at standard



PS-0402-PGMI

4PORT 10/100/1000Mbps INDUSTRIAL SWITCH

4x10/100/1000Mbps PoE RJ45 port
 2 Gigabit SFP port, 1 Console Port
 250 Meters long distance power supply
 Should be use Cat5e or Cat6 cable
 Bandwidth : 12Gbps
 Managed Industrial PoE Switch
 5 Working Modes : Standard,AI VLAN,
 AI Extend, AI PoE, AI QoS
 Support IEEE802.3af/at standard



PS-0802-PGMI

8PORT 10/100/1000Mbps INDUSTRIAL SWITCH

8x10/100/1000Mbps PoE RJ45 port
 2 Gigabit SFP port, 1 Console Port
 250 Meters long distance power supply
 Should be use Cat5e or Cat6 cable
 Bandwidth : 20Gbps
 Managed Industrial PoE Switch
 5 Working Modes : Standard,AI VLAN,
 AI Extend, AI PoE, AI QoS
 Support IEEE802.3af/at standard

CABLES & ADAPTER



NETWORK CABLE

NETWORK CABLE CATEGORY - 6

Ethernet Cable Type - CAT6
 Solid UTP 4-pair unshielded twisted pair
 Connector Type RJ45
 Length 500 Meter
 Inner conductor 100% copper
 Material - Solid Pure Copper 23 AWG
 ISO/IEC11801,TIA-568-C.2,YD/T1019
 Quality verified by Fluke test
 Orange Color



COAXIAL CABLE

COAXIAL CABLE RG 59 + WITH POWER

Cable Type - RG 59
 Impedance 4/5C-2V (75ohm)
 Power 2x0.5mm
 Diameter 0.81mm
 Material Copper (BC)
 Capacitance 52 ± 2 pF/m
 Length 300 Meter
 The outer diameter: 6.1mm / PVC
 Blue Color



COAXIAL CABLE

COAXIAL CABLE RG 59

Cable Type - RG 59
 Impedance 4/5C-2V (75ohm)
 Diameter 0.81mm
 Material Copper (BC)
 Capacitance 52 ± 2 pF/m
 Length 300 Meter
 The outer diameter: 6.1mm / PVC
 Black Color



PAD-I202

AC/DC ADAPTER 12V - 2AMP

Adapter Type : Switching
 Input Voltage 100-240 VAC
 AC Input Frequency 50 /60 Hz
 12.0 VDC Output Voltage
 2.0 A Current, 24.0 W Output Power
 Average Efficiency During Work : 86.2 %
 Efficiency At Low Load (10%) : 66.8 %
 No-Load Power Consumption : < 0.10 W
 One Year Guarantee

SCAN ME !



Professional Video Security Solution ■

www.pinnacle.ir ■